



## MODULE MD 7.1

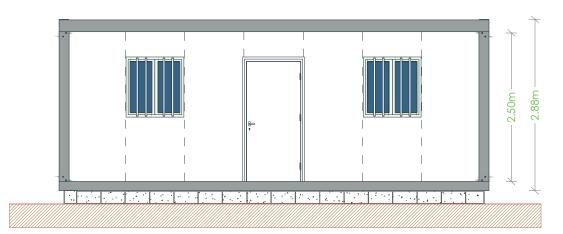

## Main Elevation

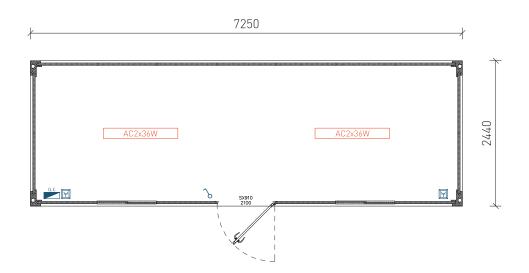

Width (Ext.) Height (Int.) Windows Doors Panel Pavement type Pavement covering Coverage Coverage Coverage isolation Electrical board	2440mm. 2500mm (Option 3000mm). Sliding lacquered white aluminium windows, 1000x1045mm, with gratings and anti-mosquito net. Lacquered white steel isolated doors, 40 mm thick (according to drawing). Sandwich 1000mm; thickness 40mm; shaped. Base: Galvanized structure with locking in omegas. Floor in MGO. Vinyl screen. Galvanized profiled plate. False ceiling consisting of 30 mm sandwich panel. Rock wool with vapor barrier, 60mm thick. 1 Differential 25A/30mA, 1 breaker 10A + 2 of 16A (with AC + 1 circuit breaker 16A).
9	Rock wool with vapor barrier, 60mm thick.
	1 Differential 25A/30mA, 1 breaker 10A + 2 of 16A (with AC + 1 circuit breaker 16A).
Sockets	Monophase and surface mounted socket (according to drawing).
Switch	Surface mount (according to drawing).